



3000W / 13A



Rubber



-20°C - +60°C



15 m

MEDIUM High Power cable reel

Features & Benefits

230VAC - 3.000 Watt power capacity

IP 40 environment tested

Red LED Power indicator

Rubber / Neoprene cable H07RN-F

- Comfortable handling even at very low temperatures

15 meters true rollable working length

- Store the hose completely back to the reel

Revolving hinge with 200° rotation

- Easy to reach your application accurately

Optional Accessories

Triple exit connector

Special versions on request

Fitted other plug systems



Steel hinge and shock-resistant
Polypropylene for best durability



Outside reachable Thermo-Fuse
and „Power-On“ LED-indicator




Different plug systems
moulded with cable

Dimensions

Angular view

Top view

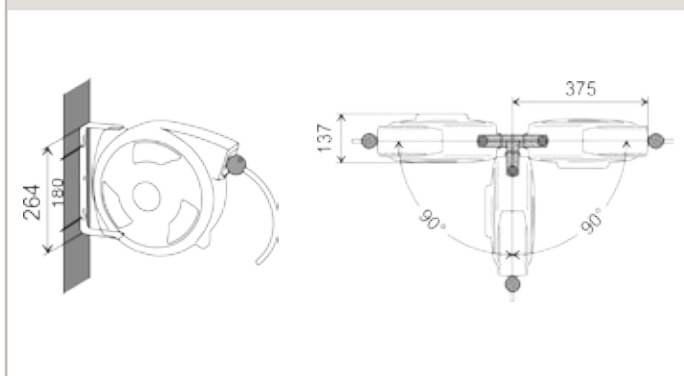

ELECTRIC CABLE REEL SERIES 362 - Versions and technical data

	Cable Material	Cable leads	Cable Length	Lead Cable	Temperature & Pressure	Plugs	IP	Weight	Part Number
Standard version EU	Rubber / Neoprene H07RN-F	3 x 1.5 mm ²	15 m (50 ft)	1 m (3 ft)	- 20°C to +60°C 1000 / 3000 W	Schuco F / M	40	6.85 kg (15 lbs)	362.1000
Standard version DK	Rubber / Neoprene H07RN-F	3 x 1.5 mm ²	15 m (50 ft)	1 m (3 ft)	- 20°C to +60°C 1000 / 3000 W	Danish	40	6.85 kg (15 lbs)	362.2000