



## System extensions of the Futura series

3/2 Directional control valve G1/4 electric operated 24V=

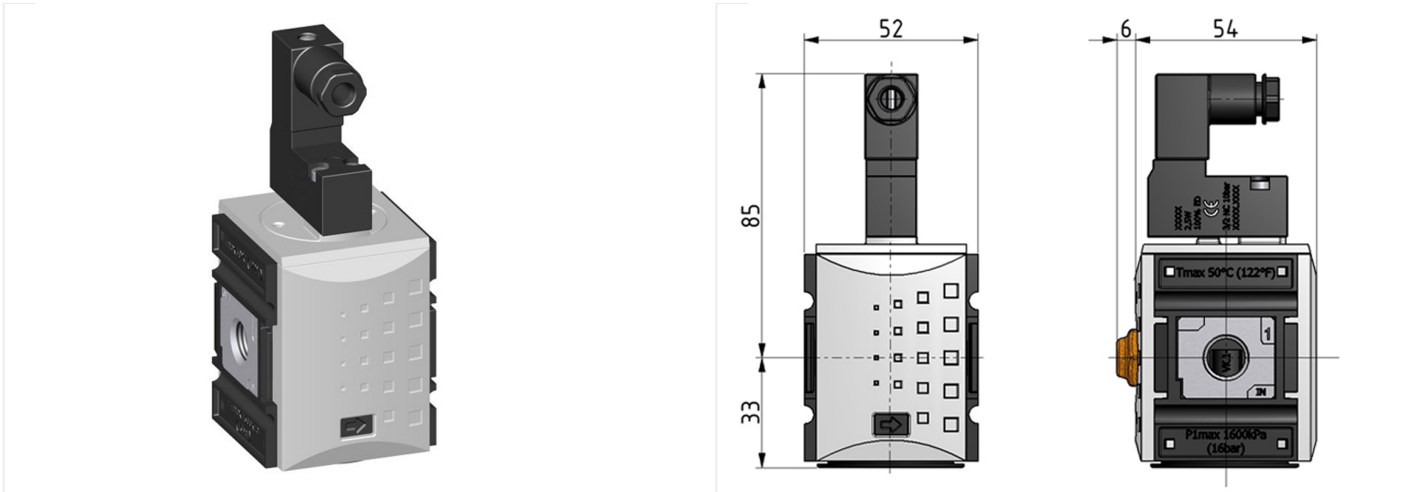


type	part-number	series	port size	flow rate	weight
KSOV-114/24	94011.CC02	Futura	G 1/4	2000 l/min	0.283 kg


flow characteristic

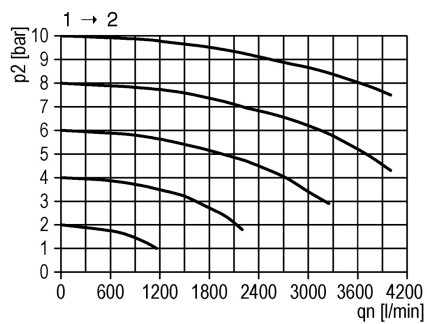

rear exhaust

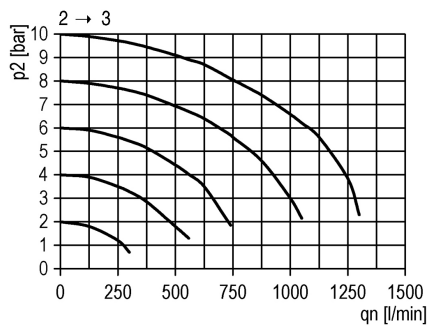

symbol



#### technical data

- **description:** 3/2 poppet valve
- **medium:** compressed air, neutral gases
- **supply pressure P1 min.:** 2 bar
- **supply pressure P1 max.:** 10 bar
- **temperature range:** -10°C - +50°C
- **input signal:** 24V=
- **exhaust:** G 1/4
- **relative switch on duration:** 100%
- **capacity:** 2,5 W
- **protection class:** IP 65 according to DIN 40050
- **electrical connection:** socket coupling EN 175301-803, form C / ISO 15217 poles 2+PE (included in scope of delivery)

#### accessories



- mounting bracket:  
[KBW 1-1225](#)



- coupling kit wall mounting:  
[KKOP.1W](#)