



Stainless steel monoblock ball valve M-M (external polished)

Features

1. Monoblock ball valve.
2. Thread ends M-M according DIN 2999 Std.
3. Reduced bore.
4. Made of AISI 316 (external polished) .
5. Painted Alluminium handle.
6. Max.. Working pressure 63 Kg/cm2.
- 7 Working Temperature $-25\text{ }^{\circ}\text{C} + 180\text{ }^{\circ}\text{C}$.

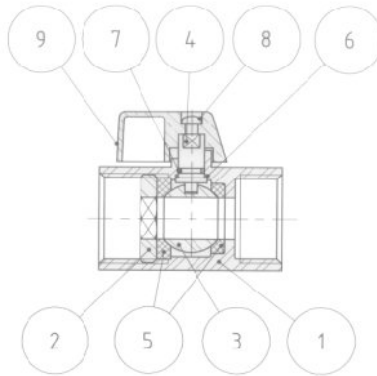


Nº	Name	Material	Treatment
1	Body	ASS 316	External polished.
2	Cap	SS 316	External polished.
3	Ball	SS 316	-----
4	Stem	SS 304	-----
5	Seat ball	Teflón (PTFE)	-----
6	Friction ring	Teflón (PTFE)	-----
7	O - Ring	NBR	-----
8	Screw	SS 304	-----
9	Handle	Alluminium	Painted

GENERAL DIMENSIONS

Ref	Size	PN	Dimensions (mm)				Weight (g)
			P	A	L	M	
MO-MGFF-02	1/4"	63	8	26	42	22	104
MO-MGFF-03	3/8"	63	8	26	42	22	92
MO-MGFF-04	1/2"	63	9	28	46	22	125
MO-MGFF-05	3/4"	63	12,5	34	54	22	211
MO-MGFF-06	1"	63	15	34	65	22	300

PRESSURE TEMPERATURE RATING

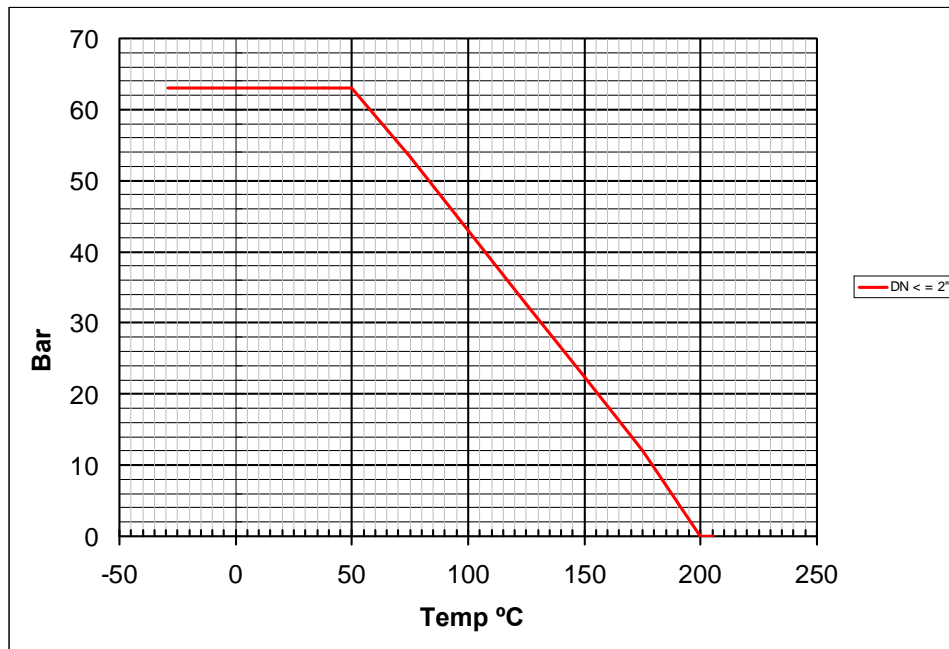

Kv VALUES

Kv = The rate of flow of water in cubic meter per hour that will generate a pressure drop of 1 bar across the valve.

1/4"	3/8"	1/2"	3/4"	1"
3.5	4	5	13	28