



## Lubricator of the Futura series

Micro lubricator G1/4 with PC bowl

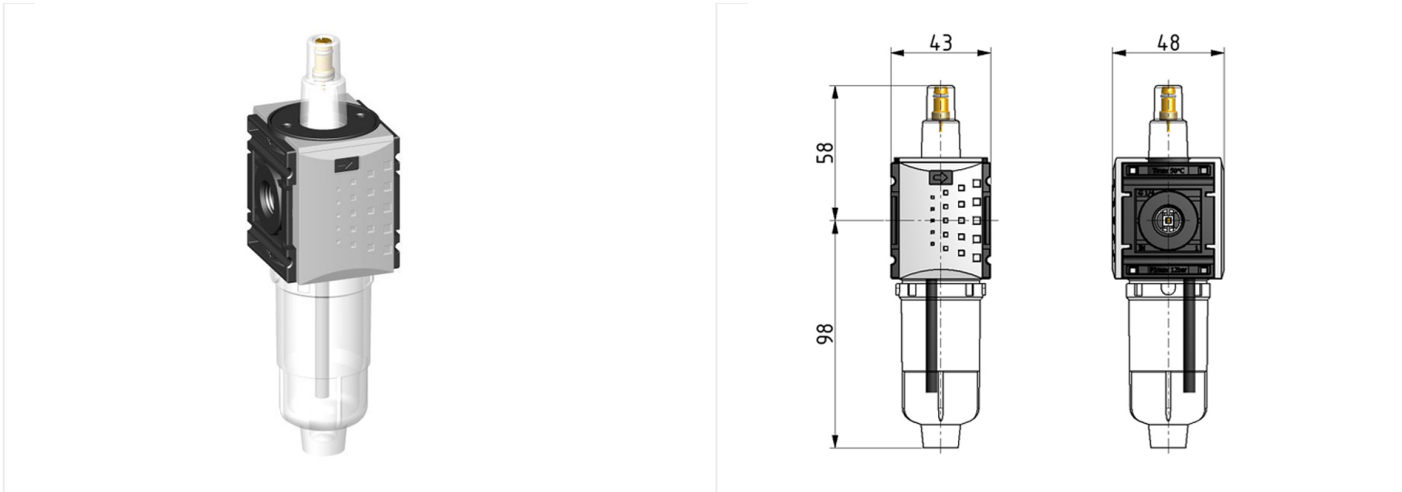


type	part-number	series	port size	flow rate	weight
KLUB-014	92500.CC00	Futura	G 1/4	1500 l/min	0.148 kg


flow characteristic

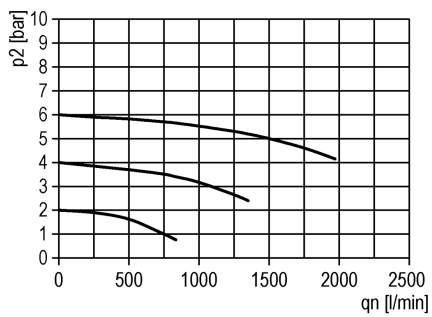

lubricator operating limit

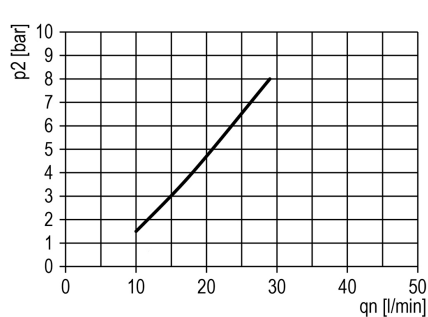

symbol



**technical data**

- **description:** micro lubricator
- **medium:** compressed air, neutral gases
- **supply pressure P1 max.:** 12 bar
- **temperature range:** -10°C - +50°C
- **bowl:** PC
- **mounting:** vertical
- **bowl volume lubricator:** 35 cm<sup>3</sup>
- **oil type:** CL 32 DIN 51517 - ISO VG 32
- **dome assembly:** PC
- **oil fill in:** cannot be filled with oil during operation

**accessories**



- mounting bracket:  
[KBW.0-1225](#)



- coupling kit wall mounting:  
[KKOP.0W](#)