



## Lubricator of the Futura series

Lubricator G1/4 with automatic oil filling, PC bowl and bowl guard

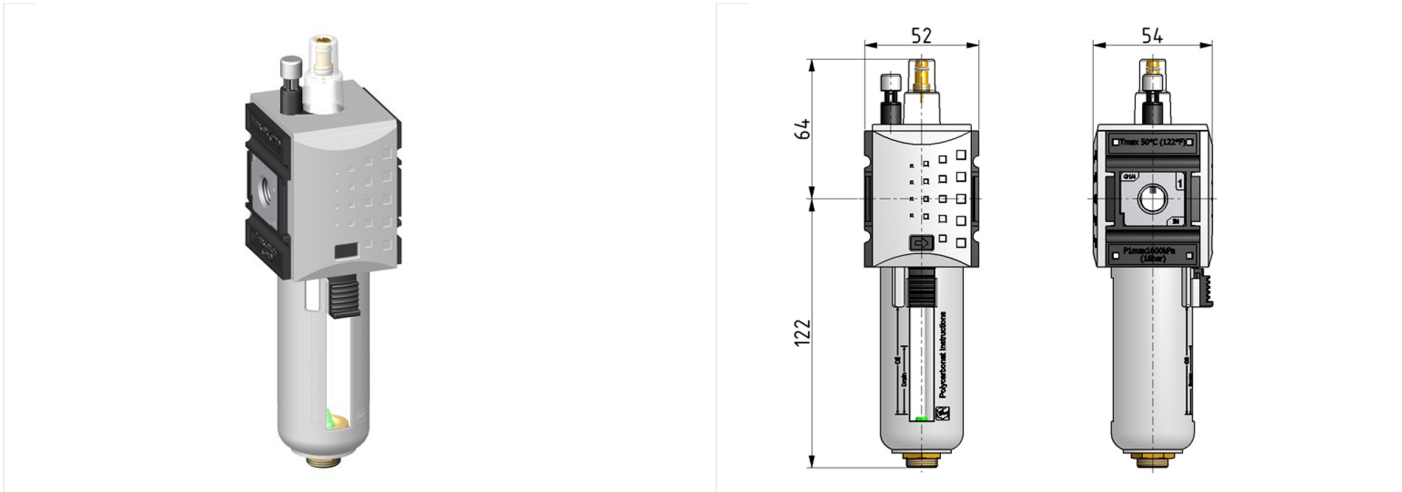


type	part-number	series	port size	flow rate	weight
KLUB-114	92501.CC00	Futura	G 1/4	2750 l/min	0.271 kg


flow characteristic

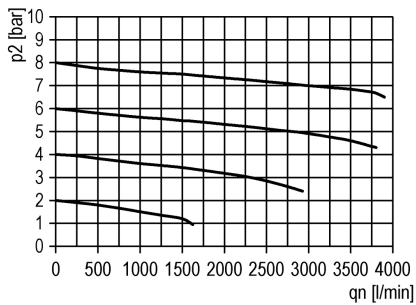

lubricator operating limit

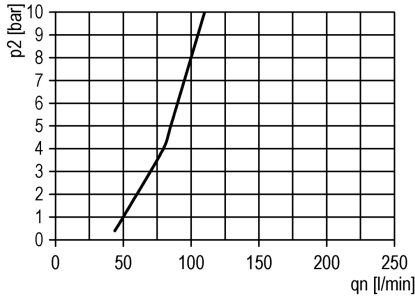

symbol



#### technical data

- **description:** lubricator with automatic oil filling
- **medium:** compressed air, neutral gases
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +50°C
- **bowl:** PC with PA bowl guard
- **mounting:** vertical
- **bowl volume lubricator:** 40 cm<sup>3</sup>
- **oil type:** CL 32 DIN 51517 - ISO VG 32
- **dome assembly:** PC
- **oil fill in:** can be oilpulling during operation

#### accessories



- mounting bracket:  
[KBW.1-1225](#)



- coupling kit wall mounting:  
[KKOP.1W](#)

- electrical level indicator  
(version addition: N)