



System extensions of the Futura series

Ball valve G1/4

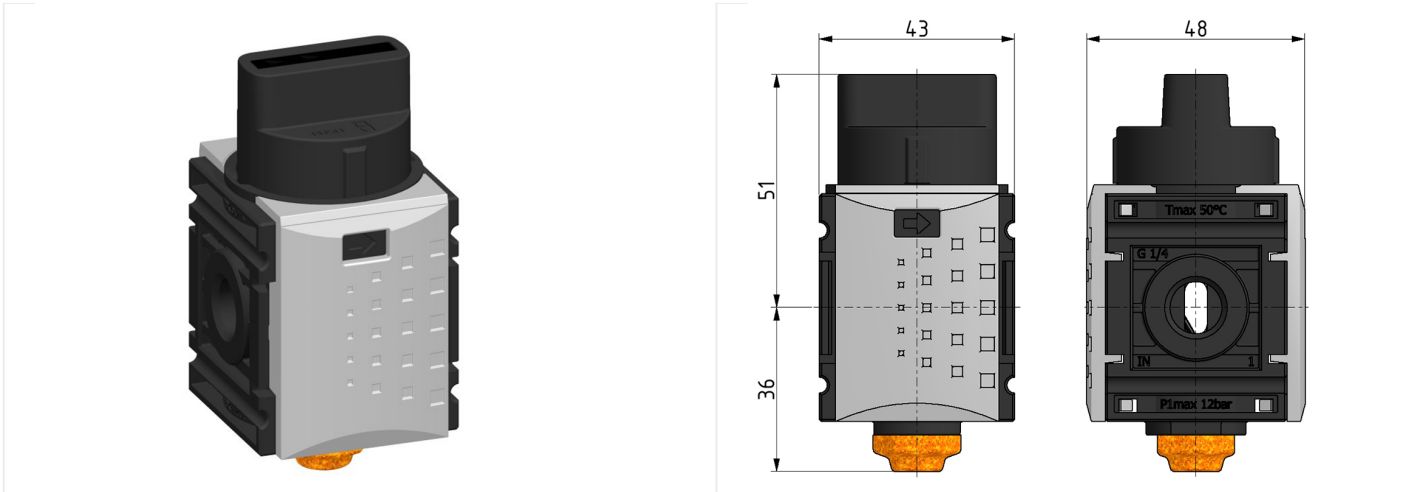

type	part-number	series	port size	flow rate	weight
KBAV-014	94000.CC00	Futura	G 1/4	2600 l/min	0.097 kg

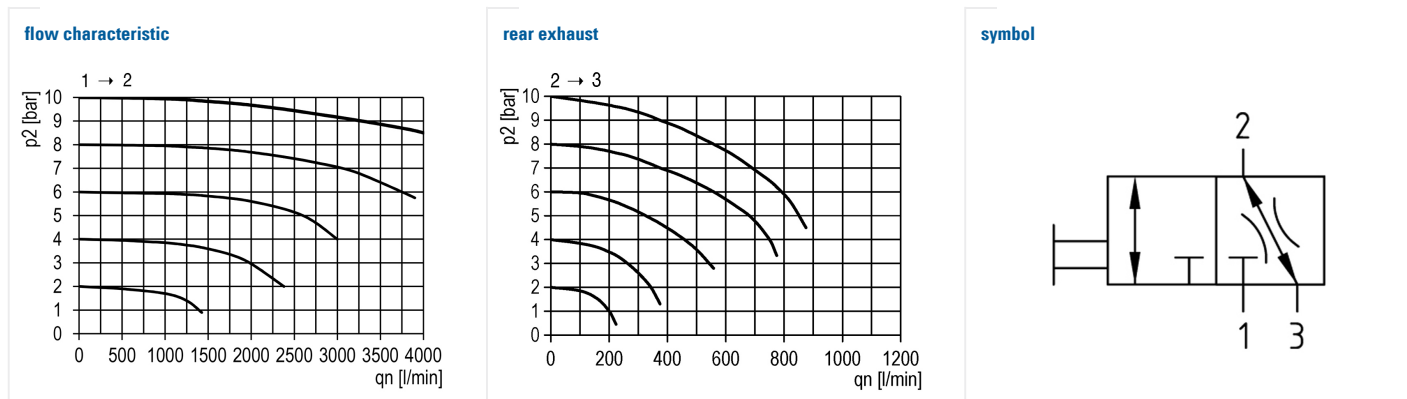

technical data

- **description:** 3/2 directional control valve, operated by a knob, 3-fold lockable with a padlock, shackle \varnothing 8mm
- **medium:** compressed air, neutral gases
- **supply pressure P1 max.:** 12 bar
- **temperature range:** -10°C - +50°C
- **locking:** lockable with padlock (setting knob can be locked by pressing downwards)
- **exhaust:** G 1/4
- **operating:** knob can be turned 90°
- **exhaust (2 => 3):** Qn = 380 l/min (at P1 = 6 bar, delta p = 1 bar)

accessories



- mounting bracket:
[KBW 0-1225](#)



- coupling kit wall mounting:
[KKOP.0W](#)