



WORKING CONDITIONS

Rotation: max 5-10 rpm
(higher speeds will damage the O-rings and cause leakage)

Temperature: max 180°C
Pressure: Max 350 bar

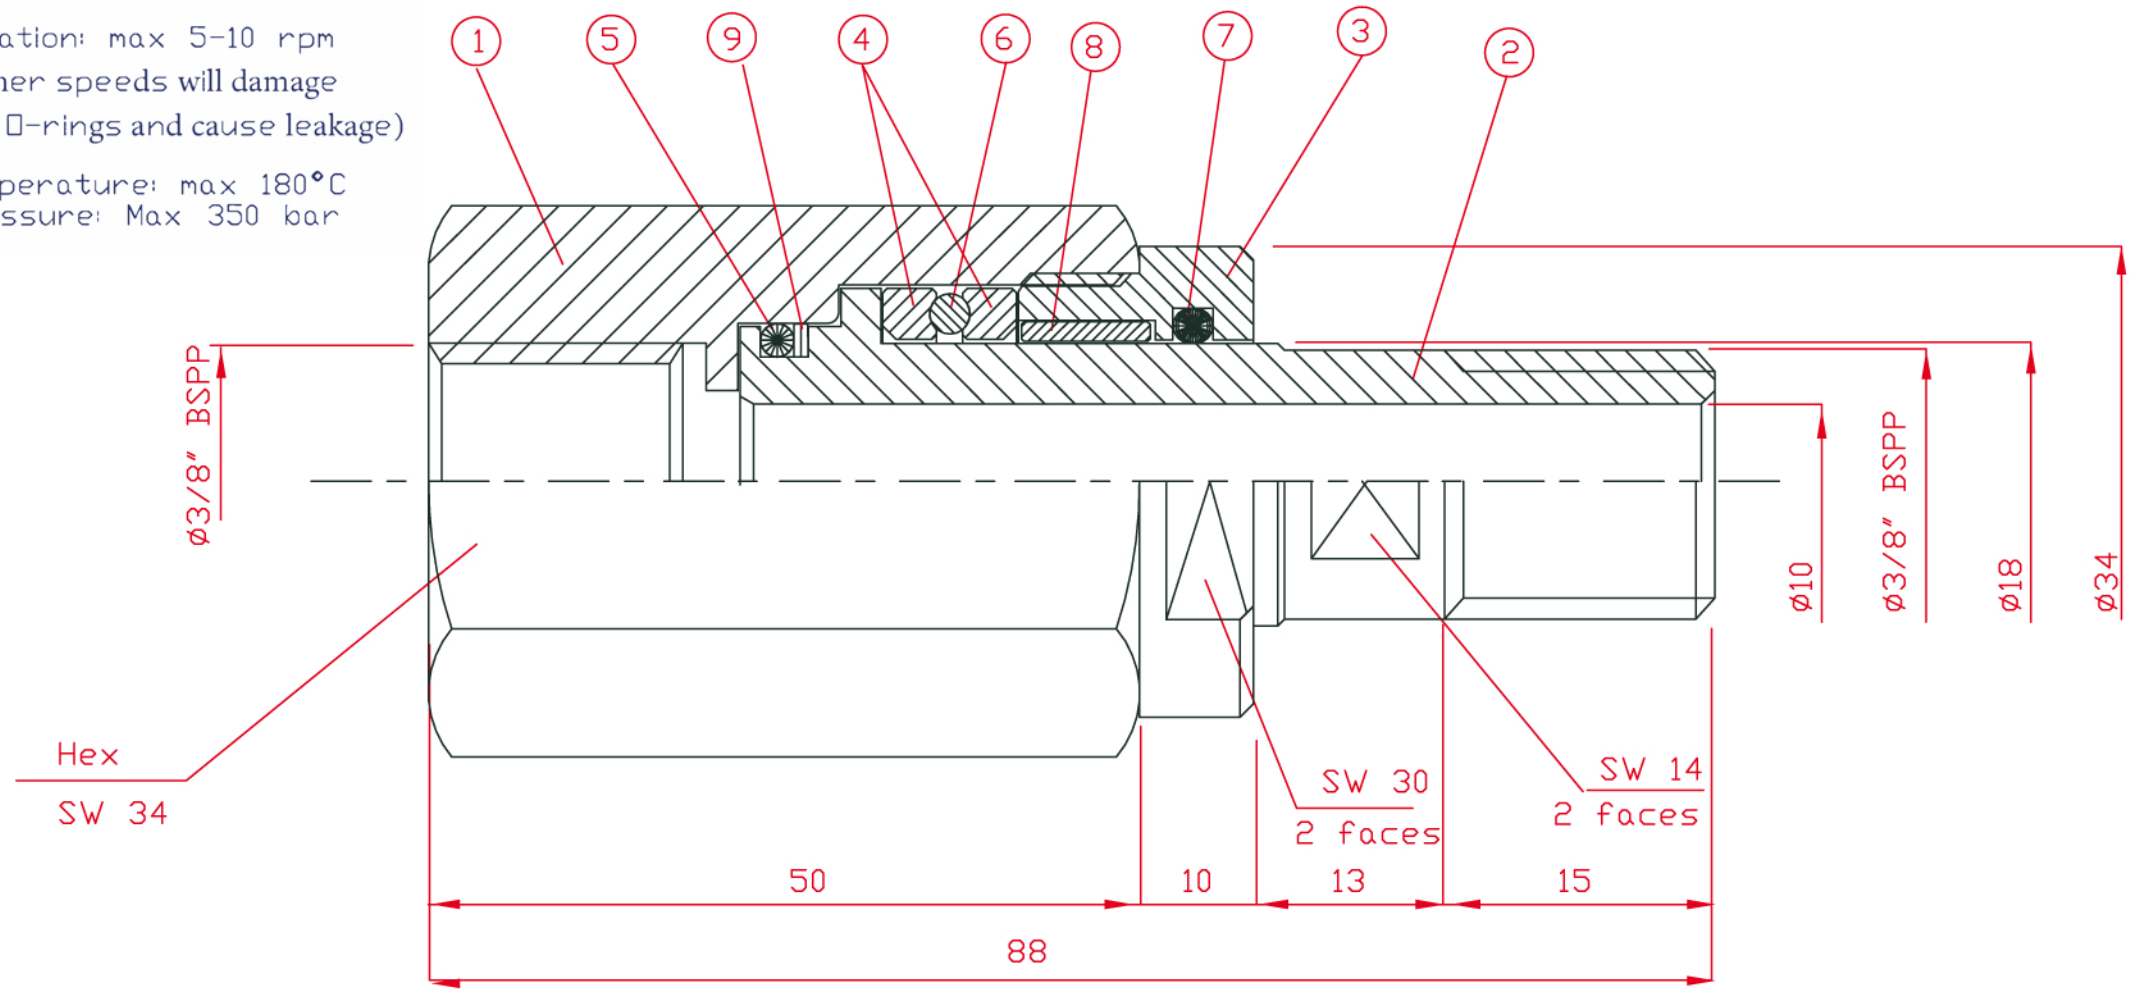

9	BK RING	501010-09	PTFE	1	5	O Ring	501010-05	FKM	1
8	ROLLERS	501010-10	SKF	48	4	BEARING GUIDES	501010-04	hardened steel	2
7	O Ring	501010-07	FKM	1	3	NUT	501010-03	SS 316	1
6	BALLS	501010-06	SS 316	26	2	SHAFT	501010-02	SS 316	1
					1	Hexagonal HOUSING	501010-01	SS 316	1
					N° PART	DESCRIZIONE	COD. DISEGNO	MATERIALE	Q.TITA'

	STRAIGHT SWIVEL	501010-0000	UPDATED 01/03/02
	ø3/8" SS316	N. Disegno	Data
	DENOMINAZIONE	Cliente	Note