



WORKING CONDITIONS

Rotation: max 5-10 rpm
(higher speeds will damage the O-rings and cause leakage)

Temperature: max 180°C
Pressure: Max 350 bar

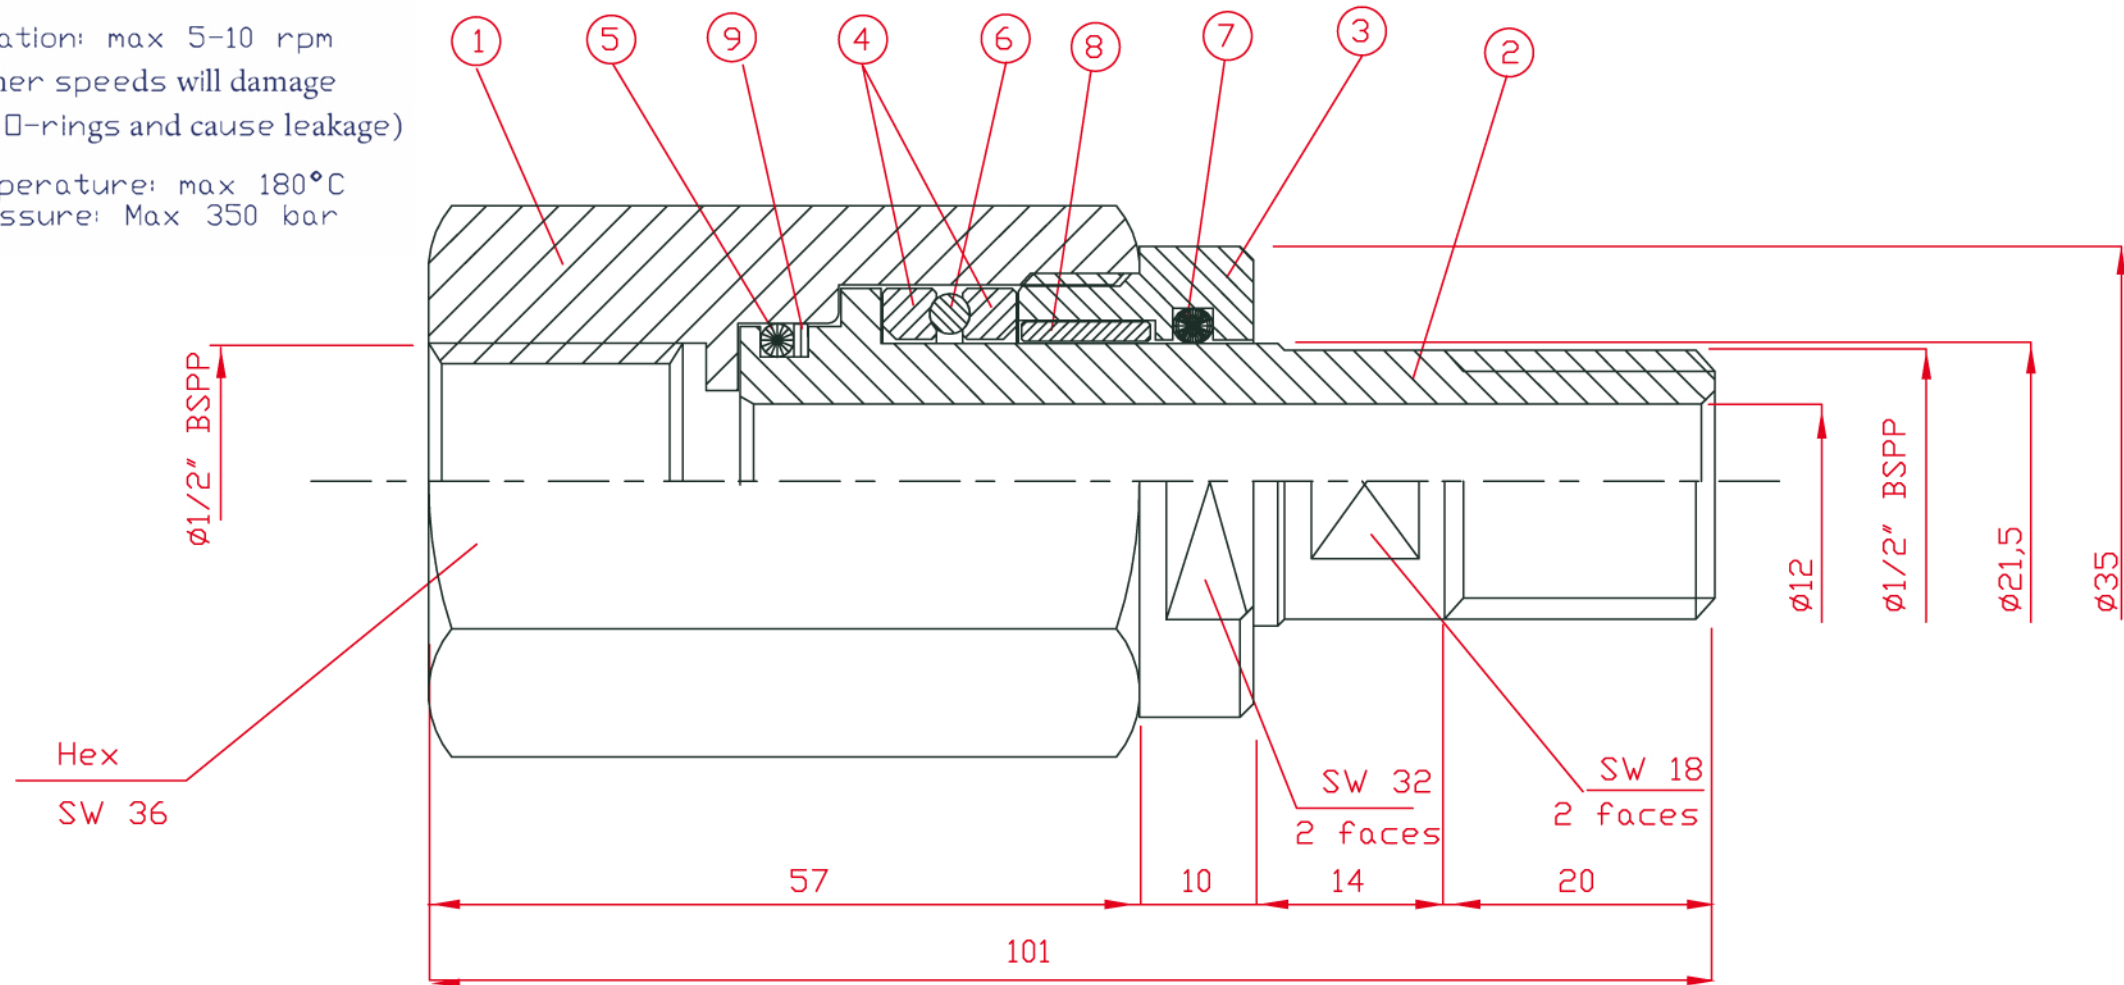

| | | | | | | | | | |
|---|---------|-----------|--------|----|---------|-------------------|--------------|----------------|---------|
| 9 | BK RING | 501015-09 | PTFE | 1 | 5 | O Ring | 501015-05 | FKM | 1 |
| 8 | ROLLERS | 501015-10 | SKF | 48 | 4 | BEARING GUIDES | 501015-04 | hardened steel | 2 |
| 7 | O Ring | 501015-07 | FKM | 1 | 3 | NUT | 501015-03 | SS 316 | 1 |
| 6 | BALLS | 501015-06 | SS 316 | 26 | 2 | SHAFT | 501015-02 | SS 316 | 1 |
| | | | | | 1 | Hexagonal HOUSING | 501015-01 | SS 316 | 1 |
| | | | | | N° PART | DESCRIZIONE | COD. DISEGNO | MATERIALE | Q.TITA' |

| | | | |
|--|--------------------|-------------|------------------|
|  | STRAIGHT SWIVEL | 501015-0000 | UPDATED 01/03/02 |
| | $\phi 1/2''$ SS316 | N. Disegno | Data |
| | DENOMINAZIONE | Cliente | Note |