



## WORKING CONDITIONS

Rotation: max 5-10 rpm  
(higher speeds will damage the O-rings and cause leakage)

Temperature: max 180°C  
Pressure: Max 350 bar

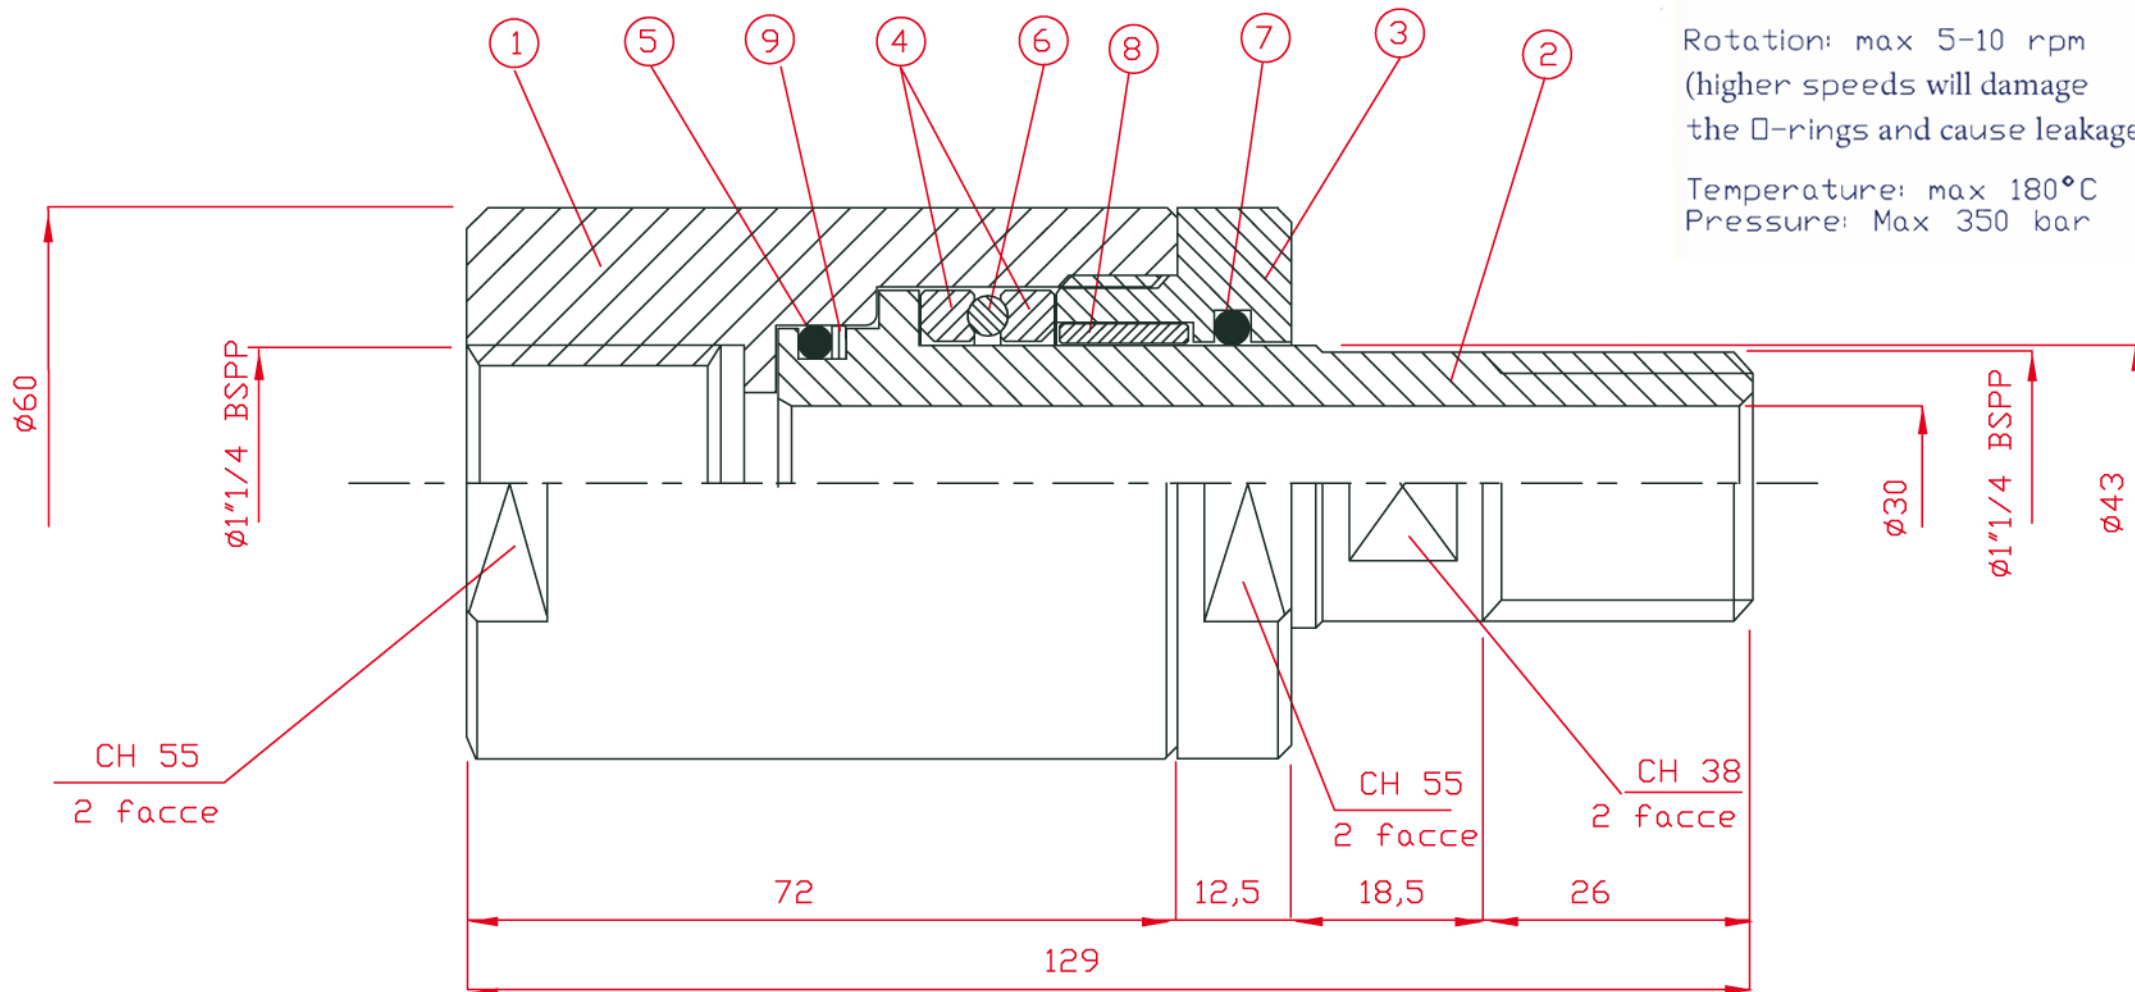

9	ANTIESTRUSORE	501032-09	PTFE	1	5	O Ring	501032-05	FKM	1
8	RULLINI	501032-10	SKF	81	4	GUIDA X SFERE	501032-04	Acc. Temprato	2
7	O Ring	501032-07	FKM	1	3	GHIERA	501032-03	SS 316	1
6	SFERE	501032-06	SS 316	44	2	PERNO GIREVOLE	501032-02	SS 316	1
					1	CORPO	501032-01	SS 316	1
					N° PART	DESCRIZIONE	COD. DISEGNO	MATERIALE	Q.TITA'

	GIUNTO IN LINEA	501032-0000	aggiornato 31/03/02
	ø1"1/4 AISI316	N. Disegno	Data
	DENOMINAZIONE	Cliente	Note