



WORKING CONDITIONS

Rotation: max 5-10 rpm
(higher speeds will damage the O-rings and cause leakage)

Temperature: max 180°C
Pressure: Max 350 bar

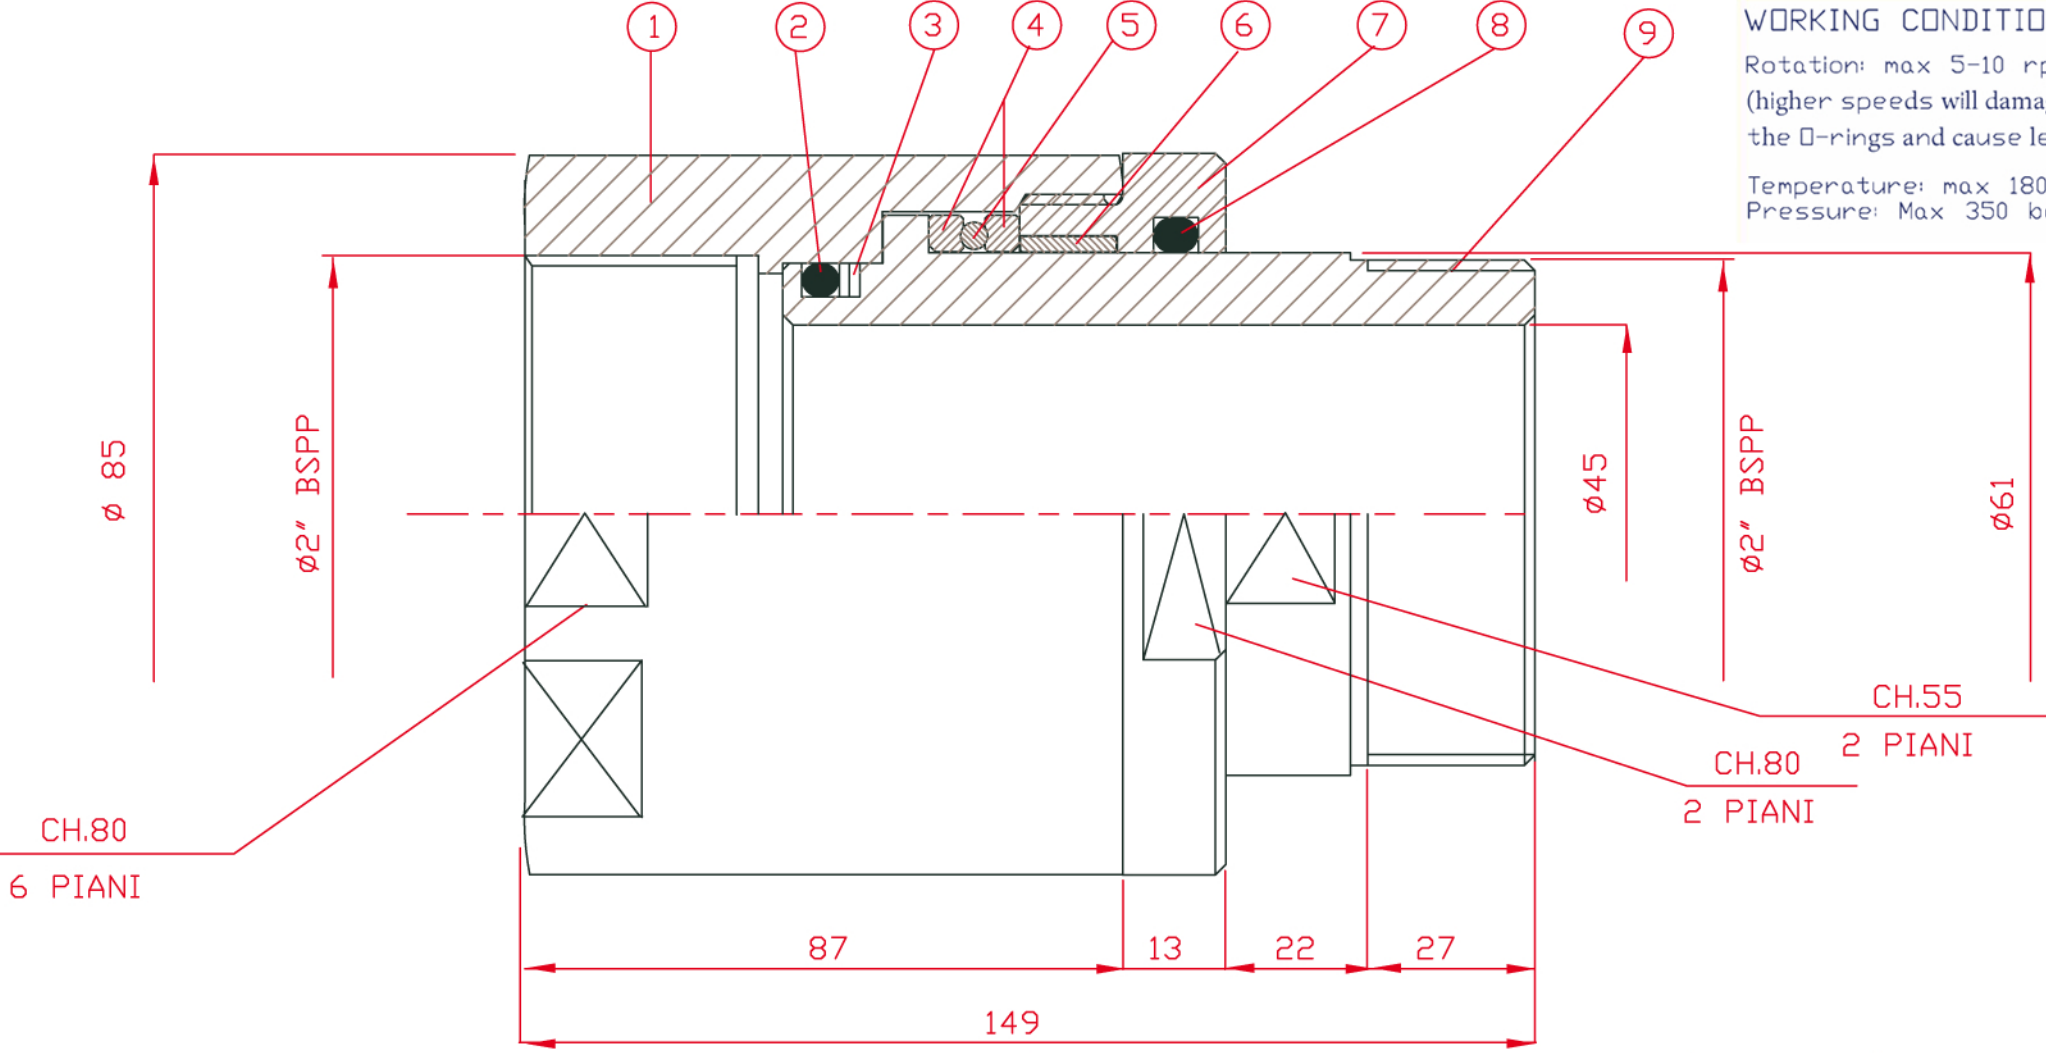

9	Perno girevole 2"	501050-2	AISI 316	1	5	Sfere	501050-7	AISI 52100	53
8	O-ring	501050-8	FKM	1	4	Anello reggispinta x sfere	501050-4	C40 tempr.	2
7	Ghiera	501050-3	AISI 316	1	3	Anello antilestrusore	501050-6	PTFE	1
6	Rullini a lenticchia	501050-9	SKF	81	2	O-ring	501050-5	FKM	1
					1	Corpo in linea 2"	501050-1	AISI 316	1
					N° PART	DESCRIZIONE	COD. DISEGNO	MATERIALE	Q.TITA'

	GIUNTO GIREVOLE IN LINEA ø2" GAS	501050-00	
	DENOMINAZIONE	N. Disegno	Data
		Cliente	Note