



## Lubricator of the Multi-Fix series

Micro lubricator G1/8 with PC bowl

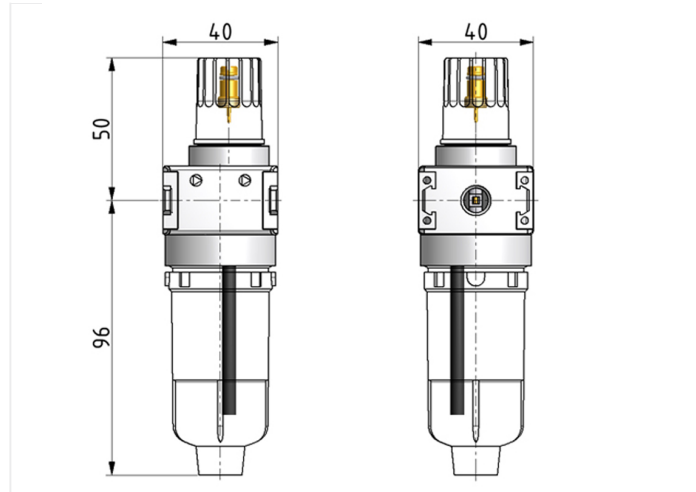


type	part-number	series	port size	flow rate	weight
L.00	9.2500.00.000	Multi-Fix	G 1/8	1150 l/min	0.263 kg


flow characteristic

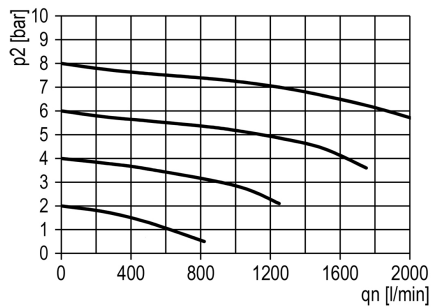

lubricator operating limit

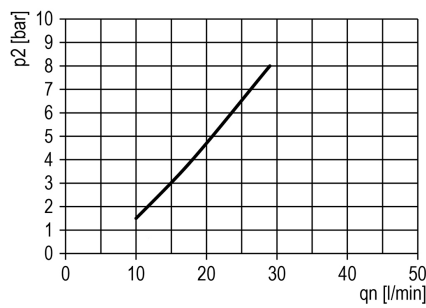

symbol



**technical data**

- **description:** micro lubricator
- **medium:** compressed air, neutral gases
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +60°C
- **bowl:** PC
- **mounting:** vertical
- **bowl volume lubricator:** 35 cm<sup>3</sup>
- **oil type:** CL 32 DIN 51517 - ISO VG 32
- **dome assembly:** PC
- **oil fill in:** cannot be filled with oil during operation

**accessories**



- |  |   |                              |
|--|---|------------------------------|
| • coupling kit wall mounting:<br><a href="#">ZW.00-1</a> | • electrical level indicator<br>(version addition: N) | • Metall-Tropfaufsatz L.33 H |
|--|---|------------------------------|