
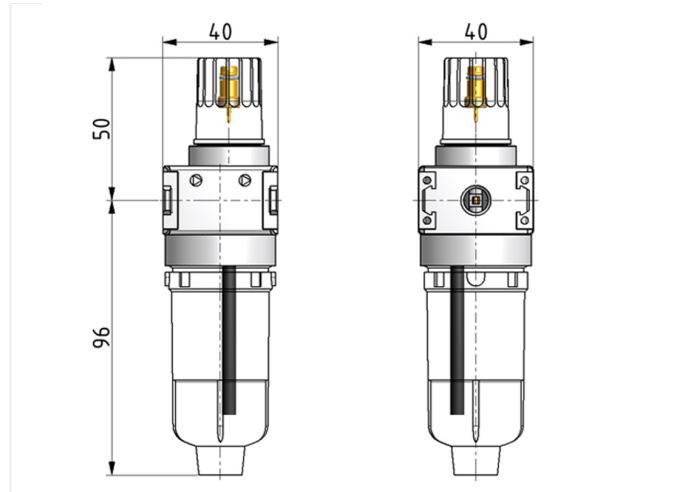



Lubricator of the Multi-Fix series

Micro lubricator G1/4 with PC bowl

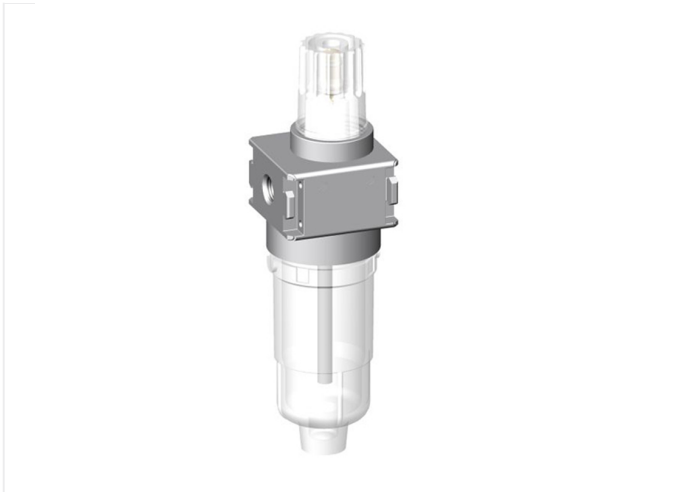


| type | part-number | series | port size | flow rate | weight |
|------|---------------|-----------|-----------|------------|----------|
| L.01 | 9.2501.00.000 | Multi-Fix | G 1/4 | 1150 l/min | 0.245 kg |


flow characteristic

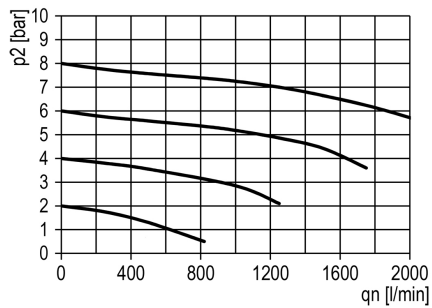

lubricator operating limit

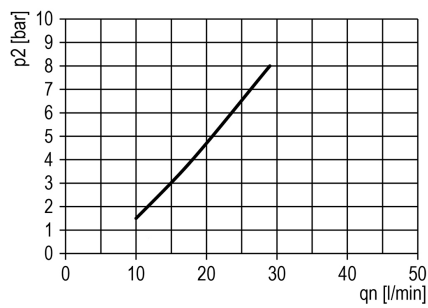

symbol



technical data

- **description:** micro lubricator
- **medium:** compressed air, neutral gases
- **supply pressure P1 max.:** 16 bar
- **temperature range:** -10°C - +60°C
- **bowl:** PC
- **mounting:** vertical
- **bowl volume lubricator:** 35 cm³
- **oil type:** CL 32 DIN 51517 - ISO VG 32
- **dome assembly:** PC
- **oil fill in:** cannot be filled with oil during operation

accessories



- | | | |
|--|---|------------------------------|
| • coupling kit wall mounting: ZW.00-1 | • electrical level indicator (version addition: N) | • Metall-Tropfaufsatz L.33 H |
|--|---|------------------------------|